


Assembly Instructions

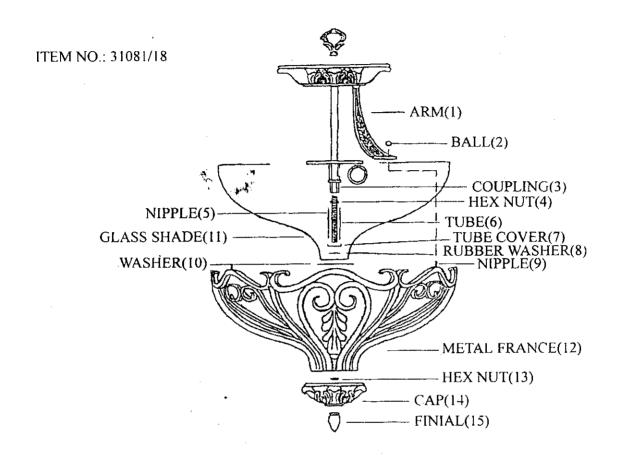

- 1. Carefully remove the fixture out of the carton, and check that all parts are included referring to the above illustration. Make sure not to misplace any parts that are needed for the installation:
- 2. Thread the HEX NUT(4) onto the NIPPLE(5) properly, then screw the NIPPLE(5) into the COUPLING(3);
- 3. Slide the TUBE(6), TUBE COVER(7), RUBBER WASHER(8), GLASS SHADE(11), WASHER(10), METAL FRANCE(12) onto the NIPPLE(5), and secure them with HEX NUT(13);
- 4. Protruding NIPPLE(9) through the holes on the bottom end of ARM(1), then fix it by BALL(2);
- 5.Slide CAP(14) onto the NIPPLE(5),then fix it by the FINIAL(15);
- 6.Install the lamps on;